

# mpca-2 (STOCK)

ship 10 pcs or fewer in 1-3 days

## pate multiple pipe curb assemblies



245 eisenhower lane south • lombard, illinois 60148  
630.705.1920 • 800.243.3018 • fax 630.705.1930  
www.patecurbs.com • e-mail: sales@patecurbs.com

### standard construction

Heavy gauge galvanized steel, unitized construction, full mitered corners, all seams welded, 1 1/2" thick rigid fiberglass insulation, 2 x 4 wood nailer strip, galvalume steel trough(s), acrylic clad ABS plastic covers, PVC boots and stainless steel clamps.

Customer:

PO:

Project:

Address:

Notes:


### pate multiple pipe curb assemblies

#### cap and boot packages

#### mpca-5 with 3 modules shown

**NOTE:** sizes listed are actual O.D.

- pcc-1** for up to 4 pipes: 1/2" - 2 7/8" O.D.
- pcc-2** for up to 2 pipes: 1/2" - 2 7/8" O.D. and 1 pipe: 3" - 5 1/2" O.D.
- pcc-2q6** for up to 2 pipes: 1/2" - 2 7/8" O.D. and for up to 4 pipes: 3/8" - 2" O.D.
- pcc-3** for up to 2 pipes: 1/2" - 2 7/8" O.D. and for up to 2 pipes: 3" - 5 1/2" O.D.
- pcc-3q6** for up to 2 pipes: 1/2" - 2 7/8" O.D. and for up to 8 pipes: 3/8" - 2" O.D.
- pcc-4** for 1 pipe: 6" - 10 3/4" O.D.
- pcc-5** for up to 5 pipes: 1/2" - 2 7/8" O.D.
- pcc-6** for 1 pipe: 3" - 5 1/2" O.D.
- pcc-6q6** for up to 4 pipes: 3/8" - 2" O.D.

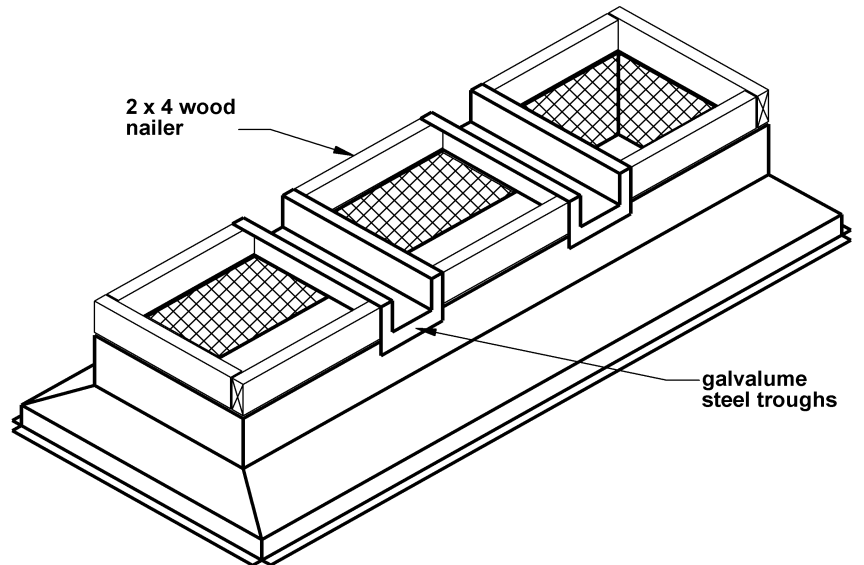

curb width = 15" O.D.

### multiple pipe curb assembly requirements

quantity	style	number of modules	curb length O.D.	*curb height	**raised cant height	cap and boot packages	notes
	MPCA-2	2	33-1/2	12	N/A		
	MPCA-2	3	52	12	N/A		
	MPCA-2	2	33-1/2	14	N/A		
	MPCA-2	2	33-1/2	18	N/A		