the pacesetter in quality prefab roof products

## pate equipment supports

## standard construction


18 ga. galvanized steel, unitized construction with integral base plate, continuous welded corner seams, pressure treated wood nailer, counterflashing with screws. Internally re-inforced to conform with **pate** load bearing factors. On **b** style supports, standard wood nailer has 1"

overhang unless otherwise specified.




245 eisenhower lane south • lombard, illinois 60148 630.705.1920 • 800.243.3018 • fax 630.705.1930 www.patecurbs.com • e-mail: sales@patecurbs.com

Customer:	
PO:	
Project:	
Address:	
Address:	
Notes:	

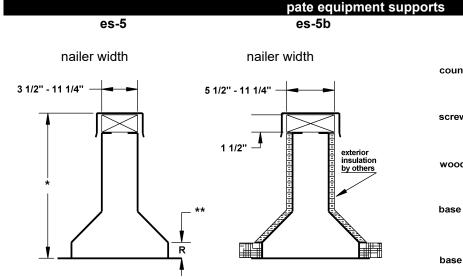

flange width

flange width



flange length: (es-5: nailer length + 10"); (es-5b: nailer length + 8")

	equipment support requirements											
quantity	style	nailer	nailer	* overall	overhang	** raised	nailer	flange	tag/notes			
		size	length	height	<b>b</b> style	cant height	width	width				

©2006 the pate company